

SRGM



SRGM GENERAL FEATURES

- ▶ Welded steel construction
- ▶ High carbon/high chrome, two edged top and four edged bottom blades
- ▶ Cutting beam working in perfectly sliding, durable teflon slideways
- ▶ Easy blade gap adjustment in front
- ▶ Mechanical sheet clamping system

SHEET METAL CUTTING MACHINES

FOR LIVES
Shaped By
METAL

DIRECT - GEAR MOTORISED GUILLOTINES





SRCM STANDARD EQUIPMENT

- ▶ NC controlled back gauge with 750 mm stroke
- ▶ Squaring arm with T-slot, stopper and ruler
- ▶ Foot pedal
- ▶ Cutting unit counter
- ▶ Front sheet holding arms
- ▶ Finger protection cages
- ▶ Rear protection cages with photocell
- ▶ Table with ball transfer
- ▶ Cutting line illumination with shadow wire

SRCM OPTIONAL EQUIPMENT

- ▶ NC controlled back gauge with 1000 mm stroke
- ▶ Pneumatic sheet support system with Return-to-Rear feature
- ▶ Rear protection cages with light barrier
- ▶ 0-180° angular cutting device
- ▶ ELGO P40T touch-screen NC control unit
- ▶ FUJI Monitouch touch-screen NC control unit
- ▶ Longer squaring arm and front sheet holding arms up to 3000 mm
- ▶ Front operated manual back gauge with ball screw

DIRECT - GEAR MOTORISED GUILLOTINES

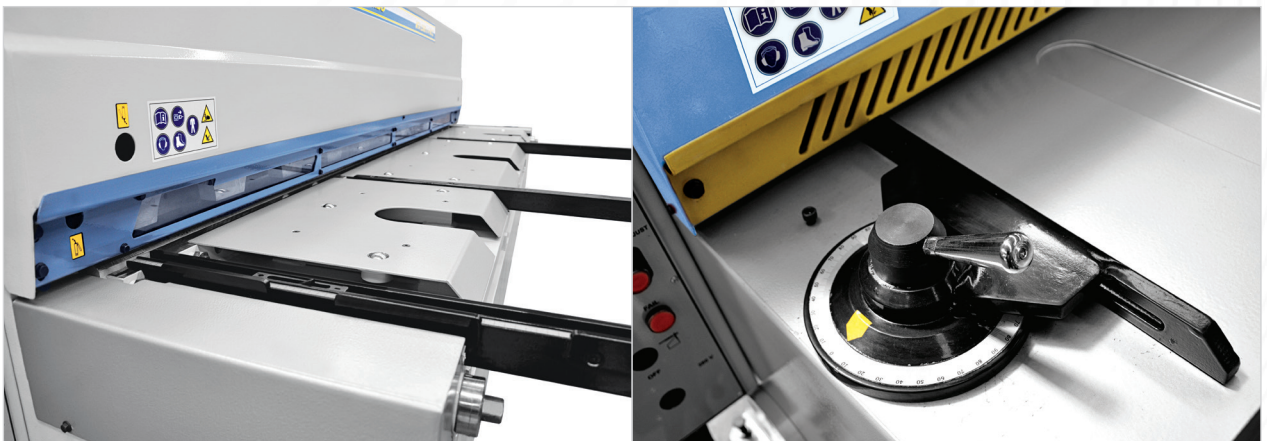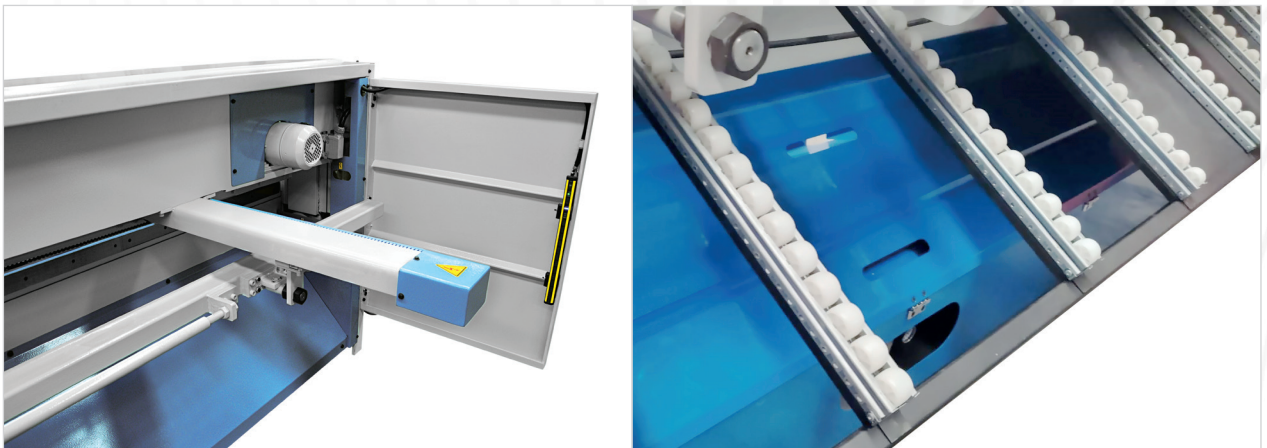

SHEET METAL CUTTING MACHINES

FOR LIVES
Shaped By
METAL

DIRECT - GEAR MOTORISED GUILLOTINES

SRGM MODELS

| MODEL | SHEARING CAPACITY | MAX. SHEARING LENGTH | STROKES PER MINUTE | MOTOR POWER | TABLE HEIGHT | TABLE WIDTH | WIDTH | LENGTH | HEIGHT | WEIGHT |
|-----------|-------------------|----------------------|--------------------|-------------|--------------|-------------|-------|--------|--------|--------|
| | mm | mm | cuts/min | kW | mm | mm | mm | mm | mm | kg |
| SRGM 1100 | 6.0 | 1100 | 31 | 7.5 | 800 | 455 | 2250 | 1750 | 1400 | 2000 |
| SRGM 1360 | 6.0 | 1360 | 31 | 7.5 | 800 | 455 | 2250 | 2050 | 1400 | 2300 |
| SRGM 1560 | 5.0 | 1560 | 31 | 7.5 | 800 | 455 | 2250 | 2250 | 1400 | 2500 |
| SRGM 2060 | 4.0 | 2060 | 31 | 7.5 | 800 | 455 | 2250 | 2700 | 1400 | 3000 |
| SRGM 2560 | 4.0 | 2560 | 31 | 7.5 | 800 | 455 | 2250 | 3200 | 1400 | 3500 |
| SRGM 3060 | 4.0 | 3060 | 31 | 11.0 | 800 | 455 | 2250 | 3700 | 1400 | 4000 |
| SRGM 3200 | 4.0 | 3200 | 31 | 11.0 | 800 | 455 | 2250 | 4300 | 1400 | 4400 |
| SRGM 4200 | 3.0 | 4200 | 31 | 11.0 | 800 | 455 | 2250 | 5300 | 1400 | 5300 |

